


## Anderson Greenwood Instrumentation Manifolds - Two Valve

A single isolate/vent block for low pressure applications and level measurement on atmospheric tanks with differential pressure transmitters

### General Application

The AS4 TVIS 2/3 is part of the Anderson Greenwood Modular Mounting System and used for flow measurement and level measurement applications with low pressure differential pressure transmitters. MESG SPE: 60.98.56/201 type C.

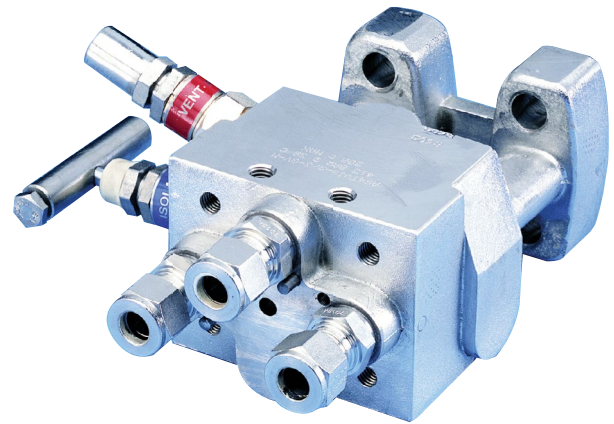

Manifold shown with factory installed tube ftgs

### TECHNICAL DATA

**Materials**

AISI 316 SS

**Connections:**
**Instrument:**

Flanged for direct mounting 2<sup>1/8</sup> (54 mm) centres and in accordance with DIN 19231 pt 2

**Process:**

G<sup>1/4</sup> parallel threaded

**Vent:**

G<sup>1/4</sup> parallel threaded

**Pressure (max):**

413 bar at 38°C

**Temperature (max):**
**PTFE packing:**

200°C

**Graphite packing:**

550°C

### Features

- Compact design provides lower installation costs and fewer potential leak points.
- Parallel thread metal-to-metal seals on process and vent connections.
- Vent valve fitted with anti-tamper facility.
- T-bar handle on isolate bonnet assembly.
- All bonnet assemblies color coded and function identified.
- Optional factory installed tube fittings in process & vent ports.
- Readily accepts a full range of accessories.

# AS4 TVIS 2/3 SERIES

## Anderson Greenwood Instrumentation Manifolds - Two Valve

### Product Overview

The AS4 TVIS 2/3 manifold can be bolted directly onto a standard mounting plate, eliminating the need for extra bracketing and minimizing pipework on site. The AS4 TVIS 2/3 has also been designed to be fitted with a full range of accessories.

### Sour Gas Service

Manifolds are available in materials which comply with the NACE standard MR-01-75 which covers metallic material requirements for resistance to sulfide stress cracking.


### Standard Valve Materials

Valve	Wetted parts				Non-wetted parts
	Valve body	Bonnet	Stem	Ball seat	Handle, jam nut and bushing
316 SS	A351-CF8M/CF3M	316 SS	316 SS	316 SS	Austenitic SS
Sour Gas	A351-CF8M/CF3M	316 SS	Alloy 400	Alloy K500	Austenitic SS

#### NOTE

- Instrument mounting: Four 7/16" UNF stainless steel mounting bolts (Grade ASTM A193 B8M.CL2) are supplied as standard. Two PTFE seal rings are supplied with the PTFE packed bonnets and two graphite rings are supplied with the graphite packed bonnets.

### Valve Schematic

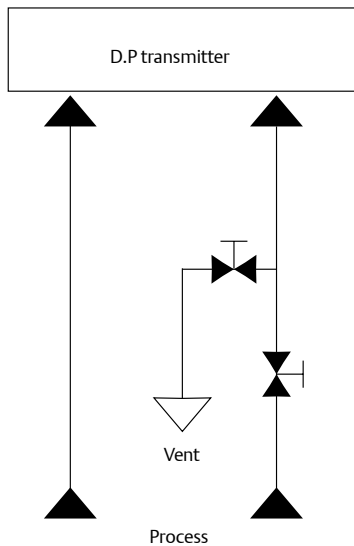

## Anderson Greenwood Instrumentation Manifolds - Two Valve

### Selection Guide

AS4T	V	I	S	-2	/3	-SG	-GYM
BASIC SERIES	BONNET PACKING	SEAT	BODY MATERIAL	PROCESS CONNECTION	MANIFOLD CONFIGURATION	MANIFOLD OPTIONS	PROCESS/VENT CONNECTION FITTINGS
<b>Valve Type</b> <b>AS4T</b> Screwed x flanged	<b>V</b> PTFE  <b>H</b> Graphite	<b>I</b> Integral	<b>S</b> 316 SS	<b>2</b> G <sup>1/4"</sup>	<b>/3</b> Single isolate/vent block	<b>SG</b> (Sour Gas) NACE edition 2003/MR0103 <b>OC00</b> Oxygen clean (OC) <b>K</b> Anti-tamper bonnet key <b>SS</b> All 316 SS construction	<b>GYM</b> Gyrolok metric (10 mm OD) <b>GYI</b> Gyrolok imperial (3/8" OD) <b>SKM</b> Swagelok metric (10 mm OD) <b>SKI</b> Swagelok imperial (3/8" OD)

#### NOTE

Manifolds are available in Monel® and Hastelloy®. Please consult the factory for availability and delivery. Monel® is a registered trademark of the Special Metals Corporation. Hastelloy® is a registered trademark of Haynes International, Inc.